



AMT-A0056 9.5 GHz to 9.7 GHz Low Noise Amplifier with 1W Limiter

Data Sheet

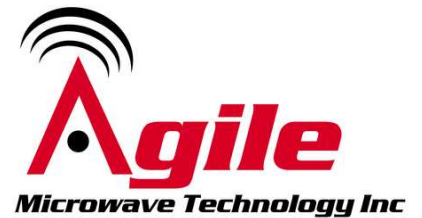

Features

- 9.5 GHz to 9.7 GHz Frequency Range
- Typical Noise Figure < 1.6 dB
- Typical Gain 25 dB
- Gain Flatness < ± 0.5 dB
- +30dBm Integrated Limiter
- Internally Regulated
- Operates from a Single Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology

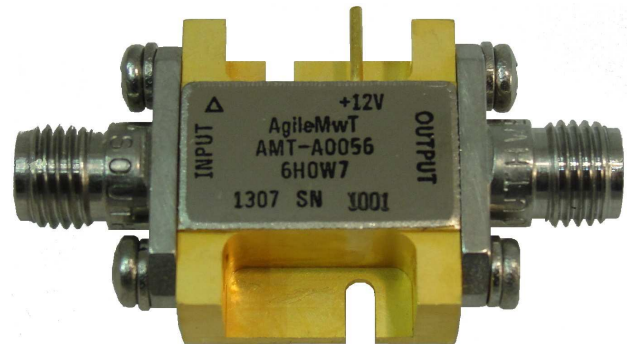

Description

The AMT-A0056 is a Low Noise amplifier with very low noise figure over the full frequency range and Integrated 1W Limiter. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms. The AMT-A0056 is ideal for use as Front End of receiver system, or where amplification is required without adding excessive noise in a Hi-Rel communications system for Commercial or Military applications

Applications

- Receiver front end,
- Radar
- Communication systems
- Microwave Radio systems
- Test Equipment

MAXIMUM RATINGS¹

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	$^{\circ}C$	-54	+85
Storage Temperature - Case	T_{MS}	$^{\circ}C$	-55	+150
RF Input power (CW)	P_{in}	dBm		+30
Die $T_{Junction}$	T_J	$^{\circ}C$		+150
Positive Supply Voltage	V_{+SS}	V		+12.5

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	9.5		9.7
Gain	Small Signal	dB	23	25	27
Gain Flatness		dB		±0.5	
Input Power	CW, without damage	dBm	+30		
Output Power (P1dB)	1 dB compression point @ 9.6 GHz	dBm		10	
OIP3	OIP3 measured @ 9.6 GHz Two tone F1-F2= 10MHz	dB		20	
Noise Figure		dB		1.5	2
RF Input Impedance	Reference to 50 ohms VSWR			1.2:1	1.4:1
RF Output Impedance	Reference to 50 ohms			1:5:1	1.8:1
Stability Factor K	Unconditionally Stable		1		
Stability Factor B1	Unconditionally Stable		0		
Supply Voltage Positive:		V		+12	
Supply Current Positive:		mA		67	100

Notes:


1/ Unconditional Stability: ($K > 1$) and ($B1 > 0$)

Customized configurations of the above specifications are available

Typical Performance @ 23°C

S- Parameters

CH1 LOG 10 dB/ REF 0 dB
S11 4:-22.819 dB 9.700 000 000 GHz

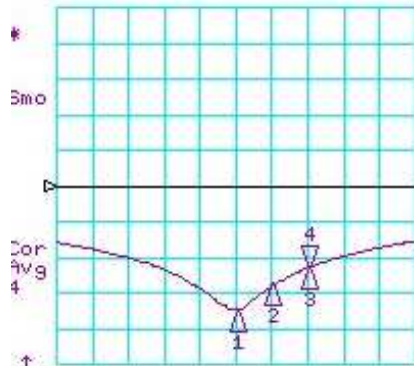


CH1 Markers

- 1:-34.789 dB
9.50000 GHz
- 2:-27.779 dB
9.60000 GHz
- 3:-22.819 dB
9.70000 GHz
- 4:-19.809 dB
9.80000 GHz

START 9000.000 MHz STOP 10000.000 MHz

CH3 LOG 10 dB/ REF -10 dB
S12 4:-54.247 dB 9.700 000 000 GHz

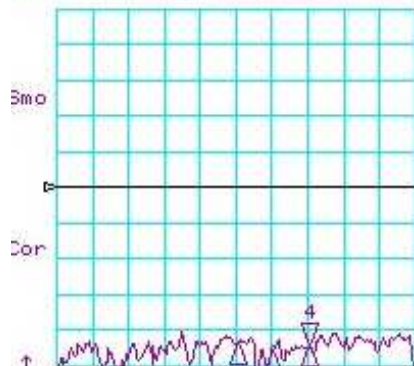


CH3 Markers

- 1:-54.072 dB
9.50000 GHz
- 2:-56.285 dB
9.60000 GHz
- 3:-54.247 dB
9.70000 GHz
- 4:-52.034 dB
9.80000 GHz

START 9000.000 MHz STOP 10000.000 MHz

CH2 LOG 5 dB/ REF 0 dB
S21 4: 25.071 dB 9.700 000 000 GHz

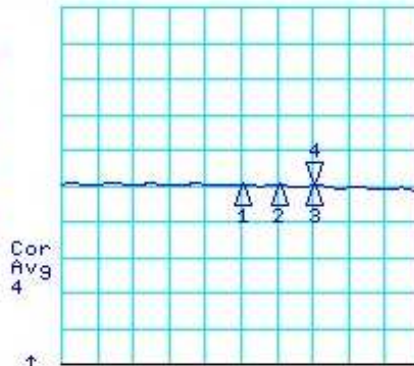


CH2 Markers

- 1: 25.268 dB
9.50000 GHz
- 2: 25.279 dB
9.60000 GHz
- 3: 25.071 dB
9.70000 GHz
- 4: 24.862 dB
9.80000 GHz

START 9000.000 MHz STOP 10000.000 MHz

CH4 LOG 10 dB/ REF 0 dB
S22 4:-12.073 dB 9.700 000 000 GHz

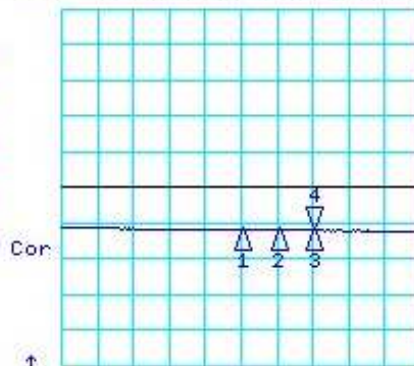

CH4 Markers


- 1:-11.864 dB
9.50000 GHz
- 2:-11.959 dB
9.60000 GHz
- 3:-12.073 dB
9.70000 GHz
- 4:-11.864 dB
9.80000 GHz

START 9000.000 MHz STOP 10000.000 MHz


Typical Performance

Noise Figure @ 23C



Agilent

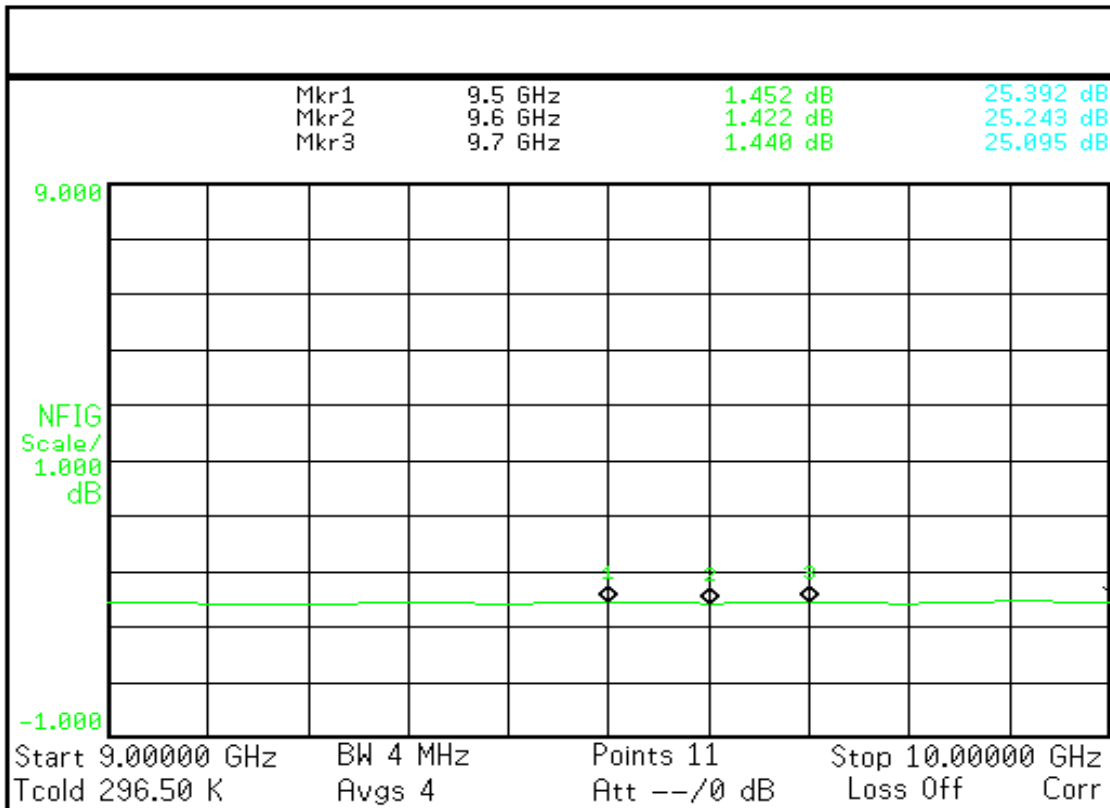

Typical Performance Power Input / Power Output @ 23C

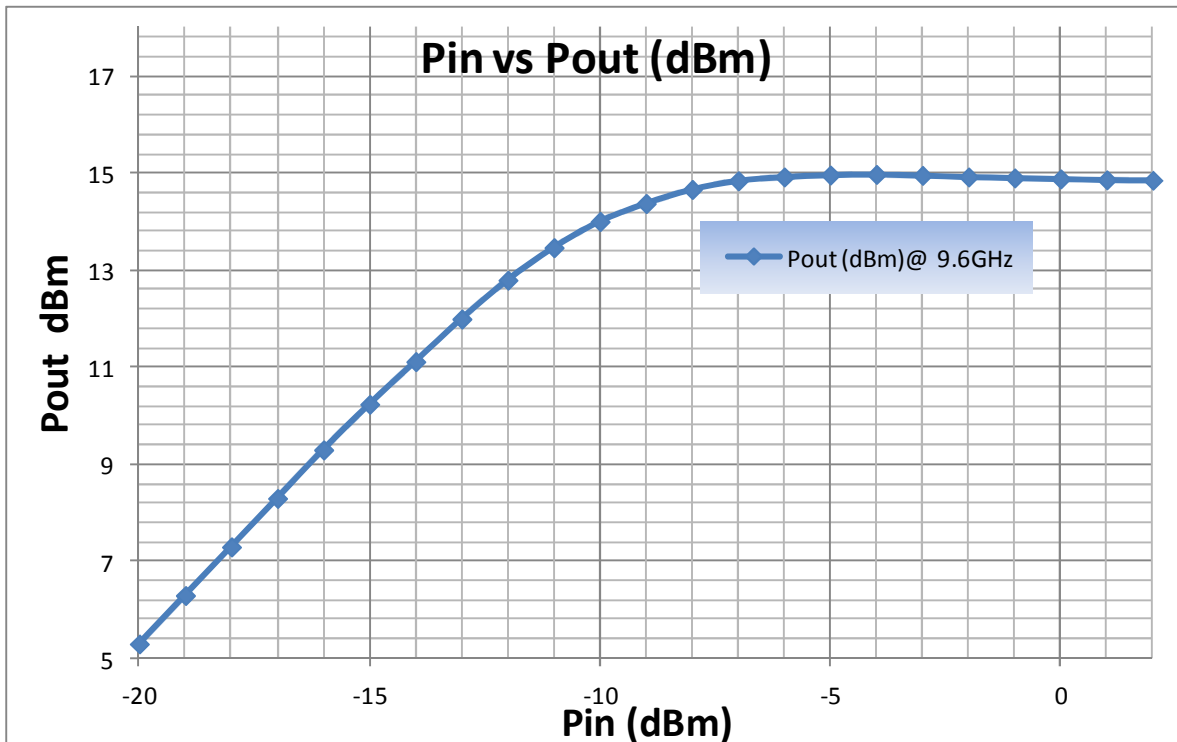

Package Outline: M004 SMA Connectorized (inches)

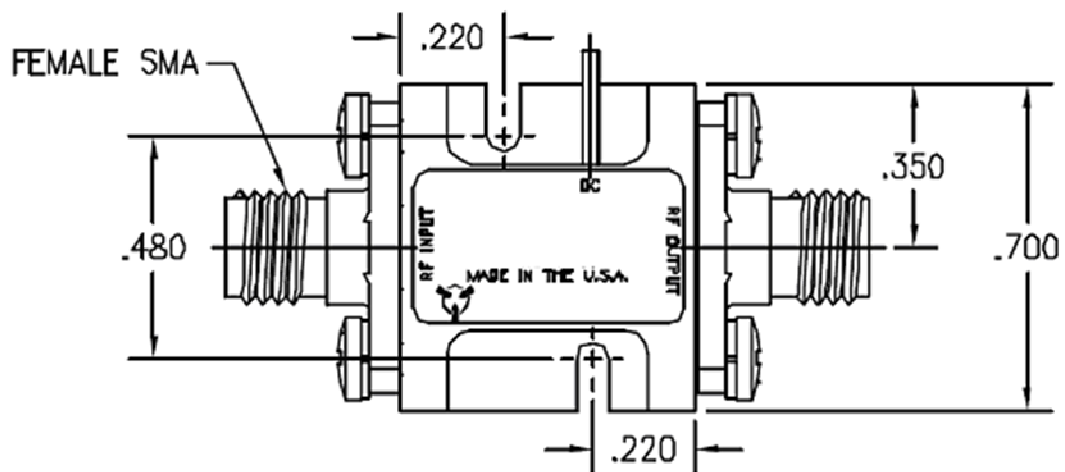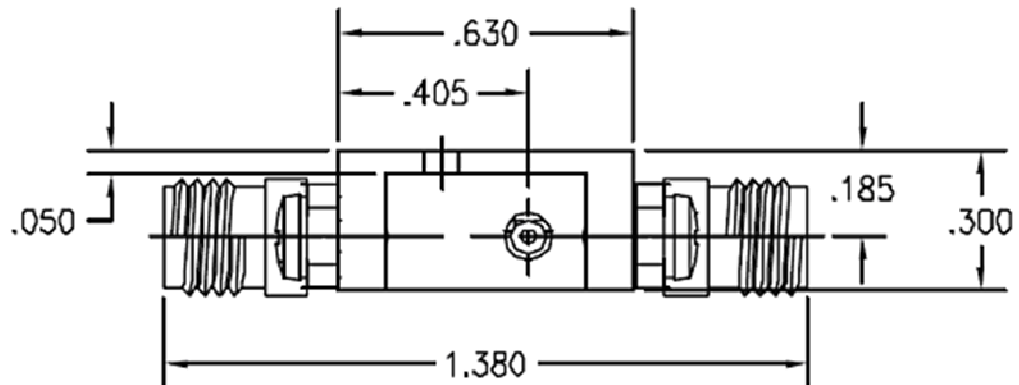

Model Number	Description	Hermeticity	Package
AMT-A0056	SMA Female	Non-Hermetic	Outline: M004
AMT-A0056-H	SMA Female	Hermetic	Outline: M004

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.


Contact Information:

**101 Bloomingdale Road
Hicksville, NY 11801**

Phone: (516) 931-1670

Fax: (212) 374-1153

info@agilemwt.com

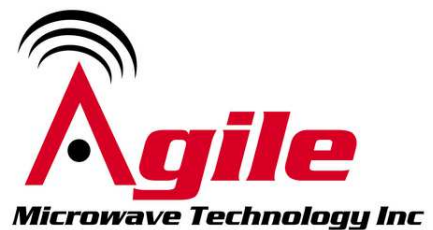

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights.