



AMT-A0119 0.8 GHz to 3 GHz Broadband High Power Amplifier 50W P1dB

Data Sheet

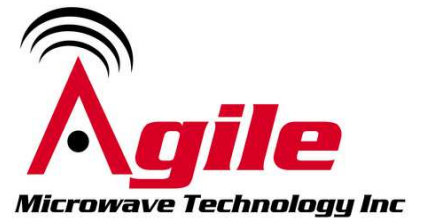

Features

- 0.8 GHz to 3GHz Frequency Range
- Class AB, High Linearity
- Gain 50 dB min 55 dB Typical
- Gain Flatness $< \pm 1.2$ dB Typical
- P1dB + 47 dBm (50W) minimum
- Internally Regulated
- Operates from a Single +30V Supply
- Unconditionally Stable
- State-of-the-Art Technology

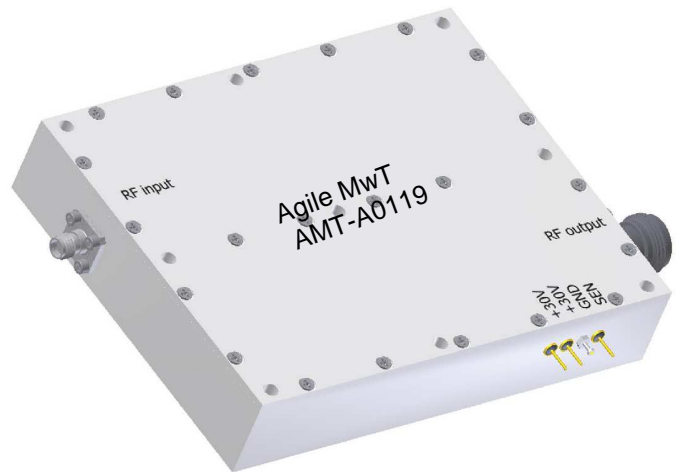

Description

The AMT-A0119 is a Broadband Power amplifier with 50W minimum power over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms and DC blocked. The AMT-A0119 is ideal for use as output power amplifier, or driver amplifier in a Hi-Rel communications system for Commercial or Military applications

Applications

- Test Equipment
- Radar
- Communication systems
- Microwave Radio systems

MAXIMUM RATINGS¹

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	° C	-10	+45
Storage Temperature - Case	T_{MS}	° C	-40	+85
RF Input power (CW)	Pin	dBm		+20
Die $T_{Junction}$	T_J	° C		+175
Positive Supply Voltage	V_{+SS}	V		+31

HPA must be attached to proper heat sink

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 25°C



Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	0.8		3
Gain ²	Small Signal	dB	50	55	
Gain Flatness		dB		±1.2	±2.5
Input Power	CW, without damage	dBm	+20		
Output Power (P1dB)	1 dB compression point	dBm	+47	+48.5	
OIP3	OIP3 measured @ 1.275 GHz Two tone F1-F2= 10MHz	dB		57	
Noise Figure		dB		5.5	10
RF Input Impedance	Reference to 50 ohms VSWR			1.5:1	2.0:1
RF Output Impedance	Reference to 50 ohms			1:5:1	2.0:1
Harmonics	Pout= 50W	dBc		-25	-18
Spurious	Pout= 50W	dBc		-70	-60
Supply Voltage Positive:		V		+30V	
Supply Current Positive:		A		7	14

Notes:




1/ Unconditional Stability:

Customized configurations of the above specifications are available

Measured Power Data @ 25°C
S- Parameters

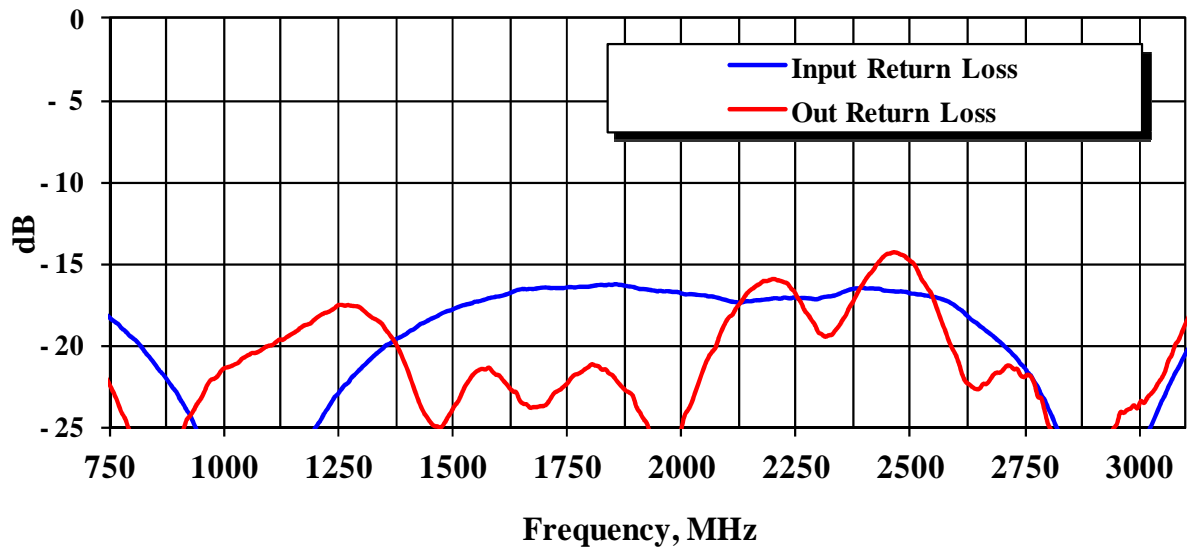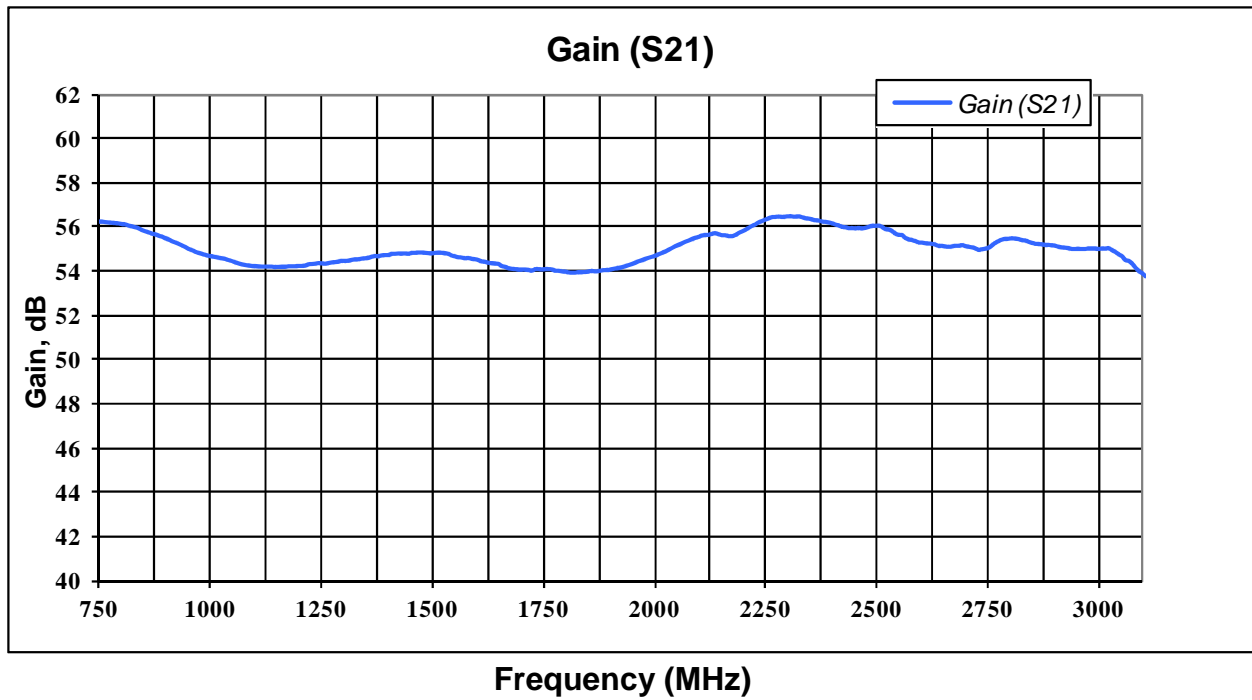


Measured Power Data @ 25°C
Power P1dB, Psat and OIP3

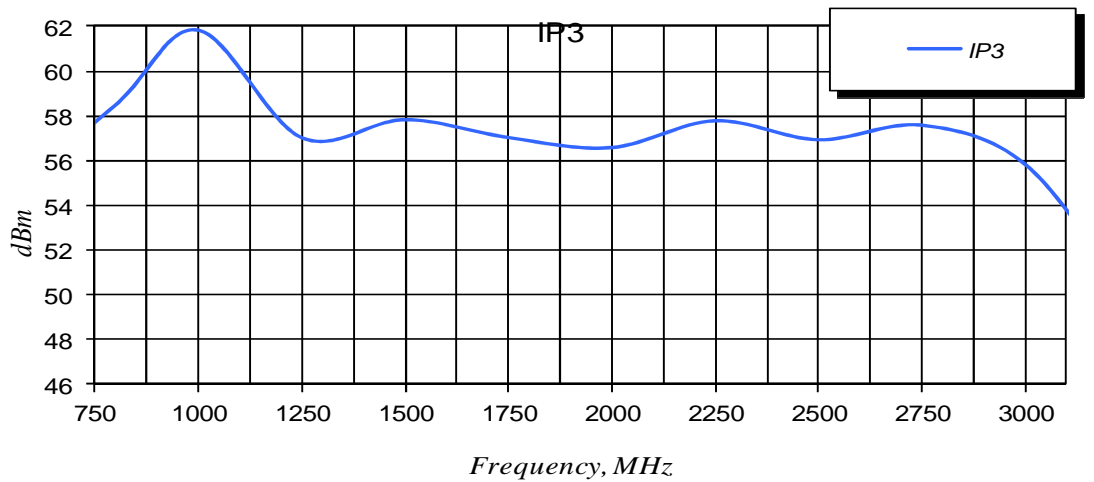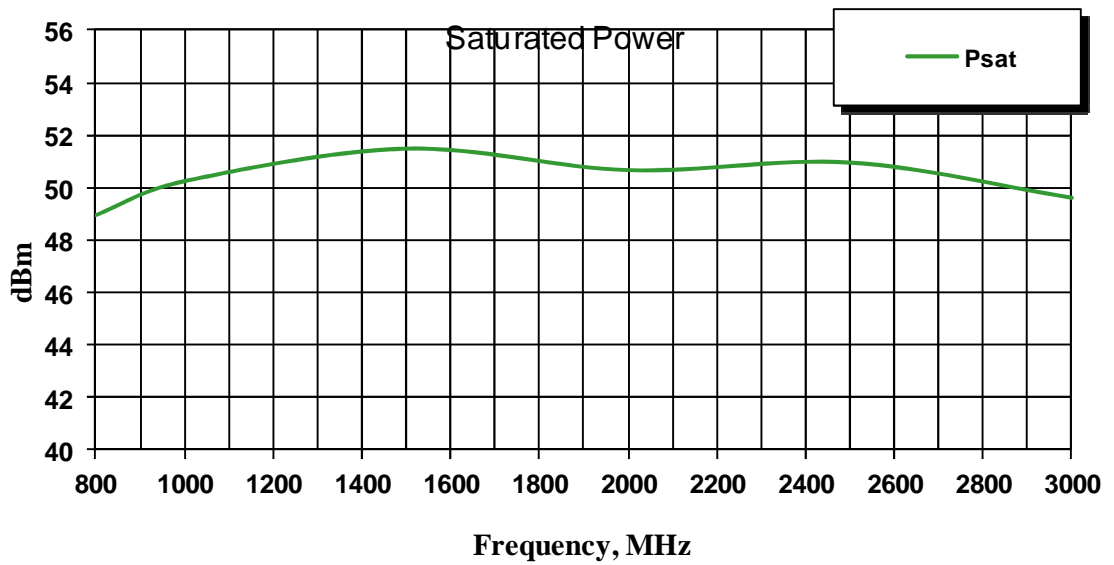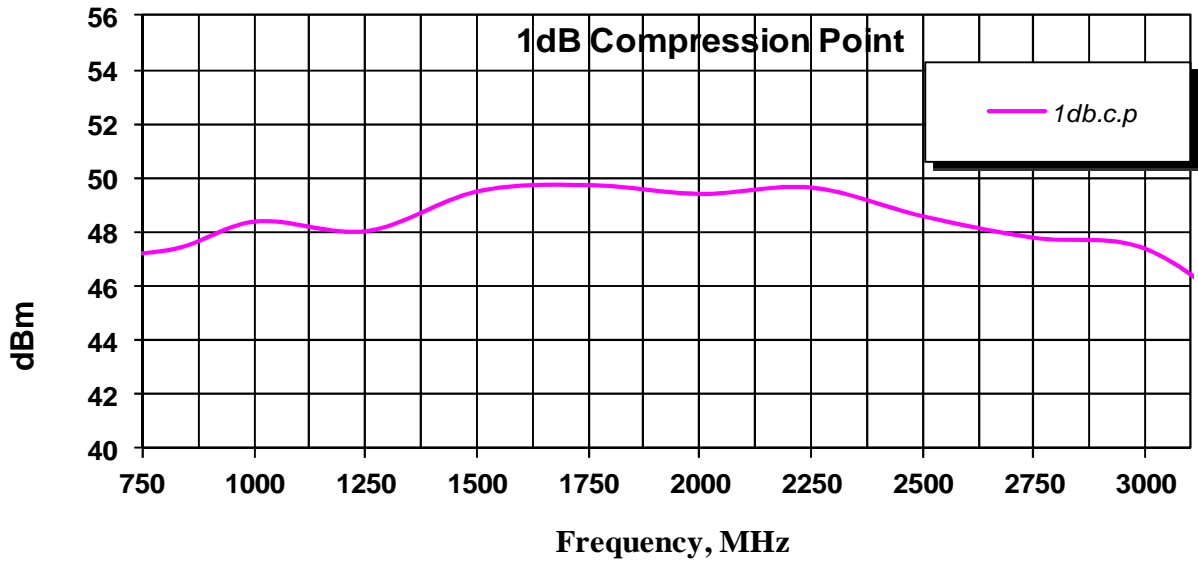


Measured Power Data @ 25°C Harmonics

2nd Harmonic


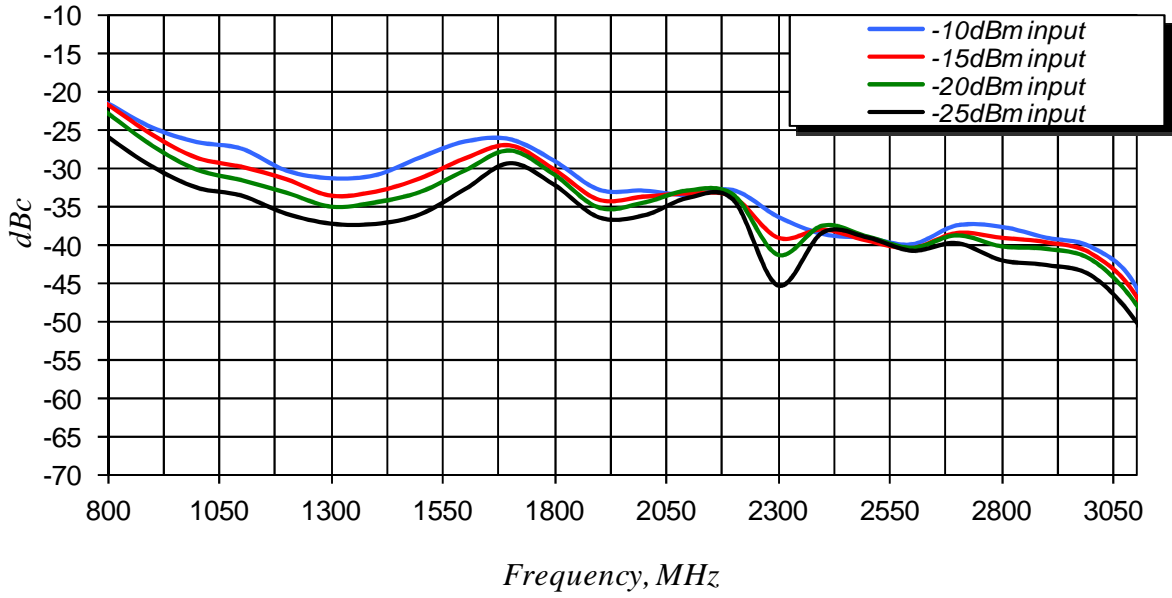


3rd Harmonic

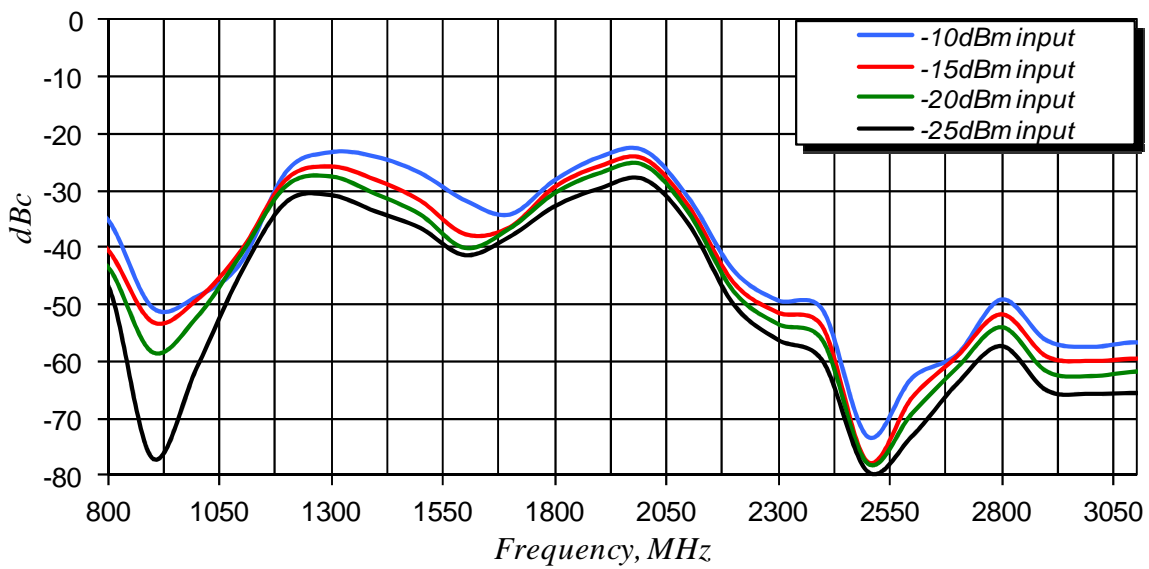

Package Outline: RFout N-Connector Input SMA Female mm(inches)

~ 10.2" X 4" X 1"

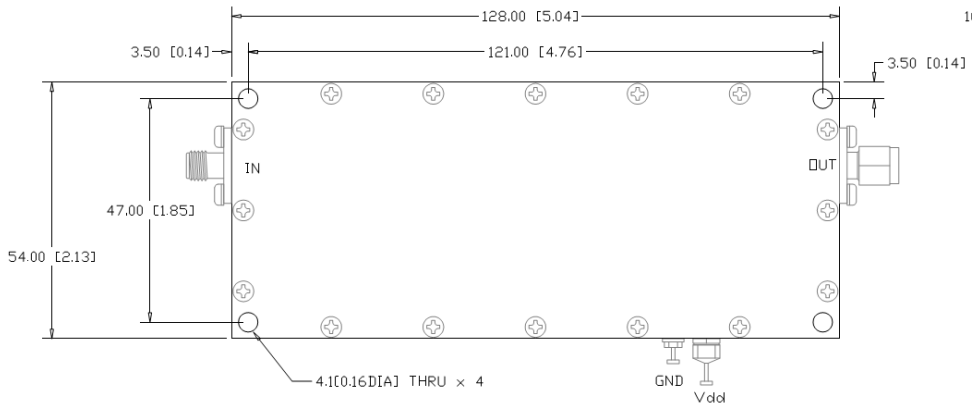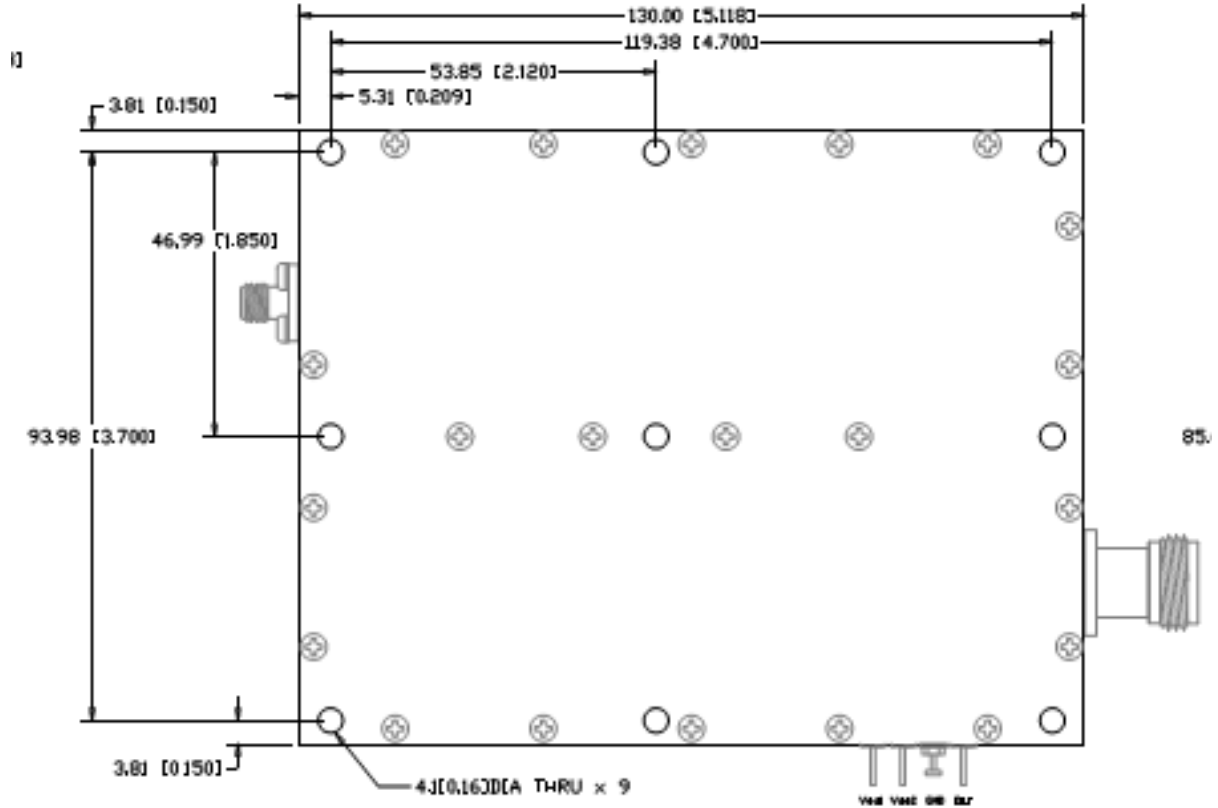

High Power Amplifier must be mounted to proper heat sink

Model Number	Description	Hermeticity	Package
AMT-A0119	Input N Output :SMA Female	Non-Hermetic	Outline: Mounting Plate

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.


Contact Information:

**101 Bloomingdale Road
Hicksville, NY 11801**

Phone: (516) 931-1760

Fax: (212) 374-1153

info@agilemwt.com

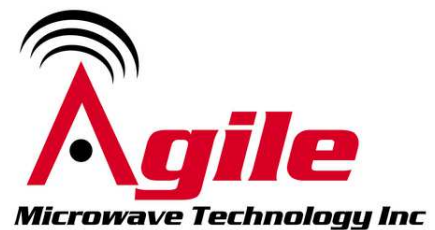

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights.