


AMT-A0149 2000 MHz to 2200 MHz Ultra High Linearity Low Noise Amplifier

Data Sheet



Features

- 2000 MHz to 2200 MHz Frequency Range
- OIP3 +40 dBm Typical
- Typical Noise Figure < 0.6 dB
- Gain 52 dB Typical
- Gain Flatness < ± 0.7 dB
- P1dB +24 dBm Typical
- Internal DC Regulator
- Operates from a Single +8V Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology

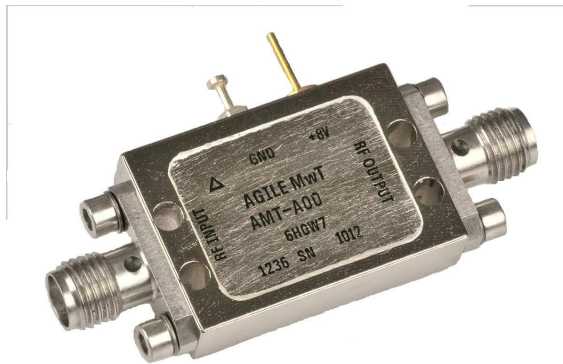

Description

The AMT-A0149 is a Ultra High Linearity Low Noise amplifier with Medium Power and very low noise figure over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms and are DC blocked. The AMT-A0149 is ideal for use as Front End of receiver system, with modulation schemes or where amplification is required without adding excessive noise in a Hi-Rel communications system for Commercial or Military applications

Applications

- Receiver front end,
- Communication systems
- Microwave Radio systems
- Test Equipment

MAXIMUM RATINGS¹

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T _{MO}	° C	-40	+85
Storage Temperature - Case	T _{MS}	° C	-40	+125
RF Input power (CW)	P _{in}	dBm		+8
Die T _{Junction}	T _J	° C		+150
Positive Supply Voltage	V _{+SS}	V		+15

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C


Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		MHz	2000		2200
Gain	Small Signal	dB	49	52	
Gain Flatness		dB		±0.7	±1.6
Output Power (P1dB)	1 dB compression point @2.1 GHz	dBm		+24	
OIP3	OIP3 measured @ 3 GHz Two tone F1-F2= 10MHz	dB	35	40	
Noise Figure		dB		0.6	0.9
RF Input Impedance	Reference to 50 ohms VSWR			1.5:1	2.0:1
RF Output Impedance	Reference to 50 ohms			1:5:1	2.0:1
Stability Factor K	Unconditionally Stable		>1		
Stability Factor B1	Unconditionally Stable		>0		
Supply Voltage Positive:		V		+8V	
Supply Current Positive:		mA		235	260

Notes:


1/ Unconditional Stability: ($K > 1$) and ($B1 > 0$)

Customized configurations of the above specifications are available



Typical S-Parameters @ 23°C

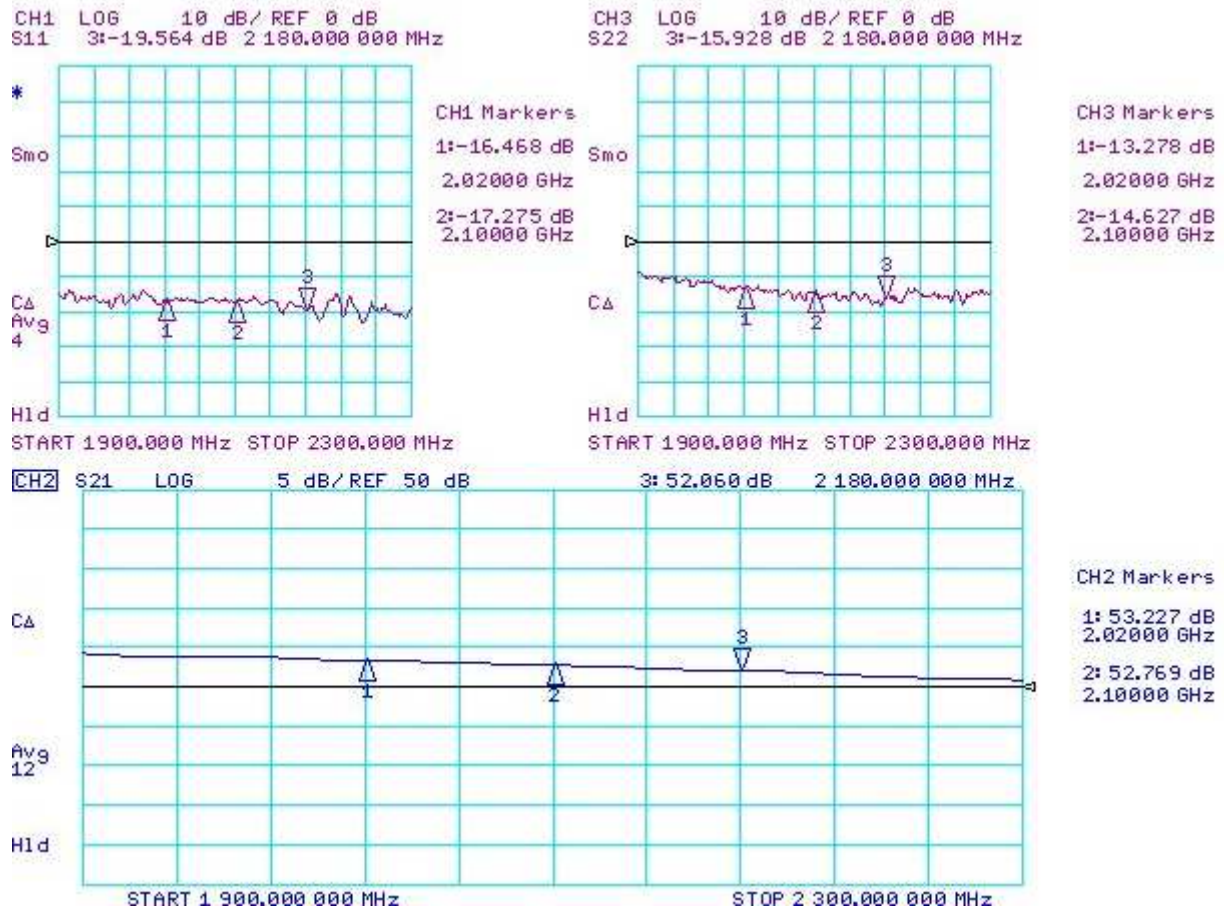

Typical Noise Figure @ 23°C

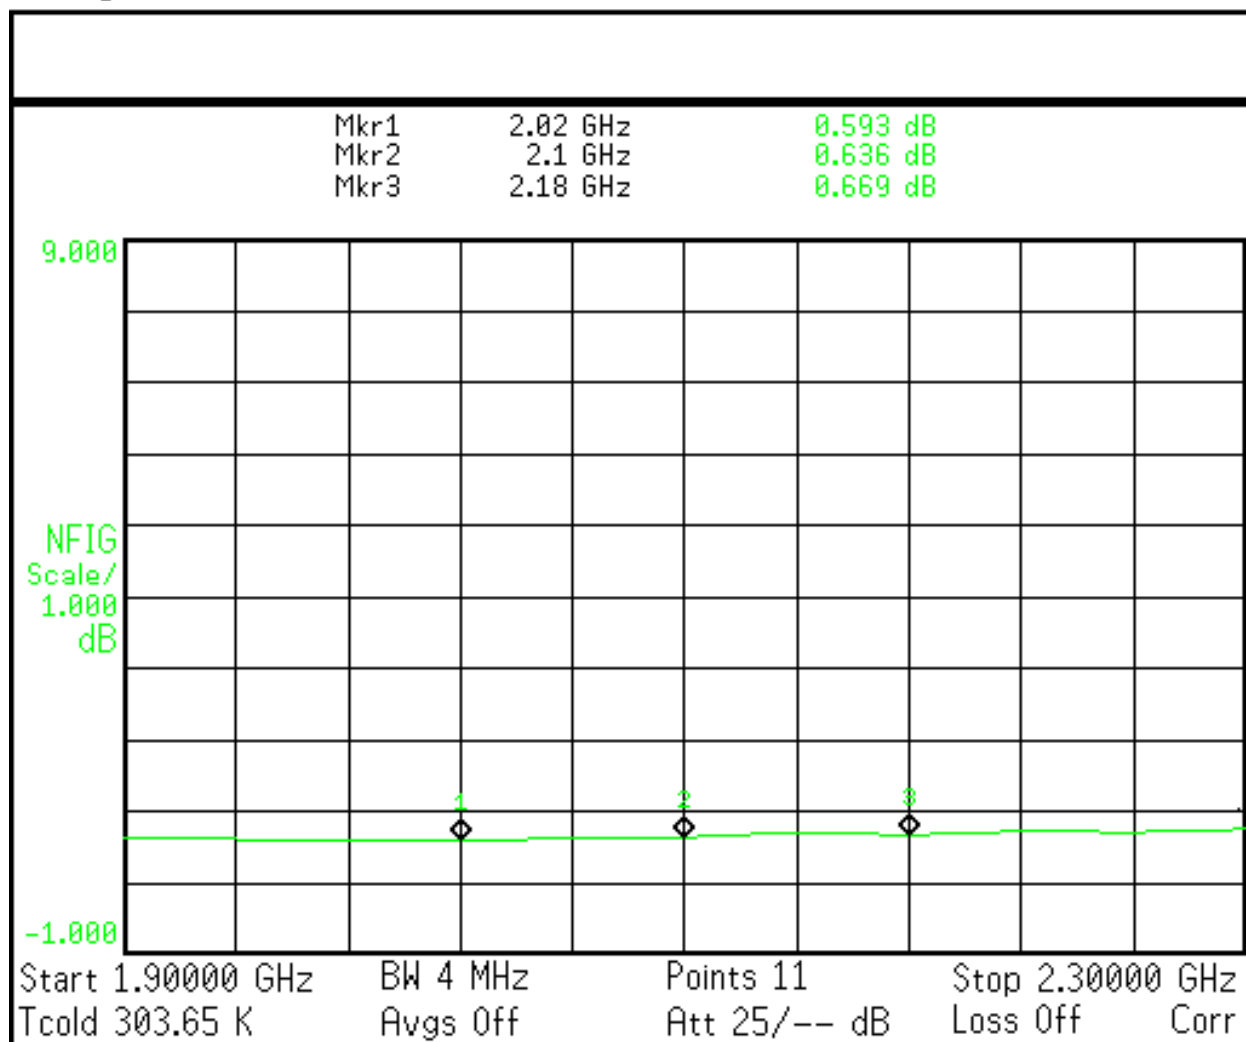

Package Outline: SMA Connectorized inches [mm]

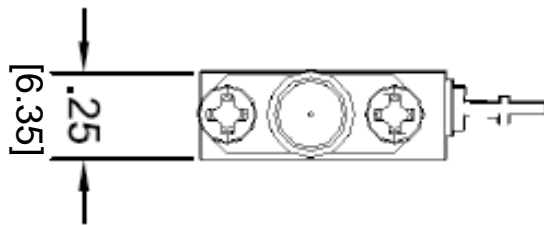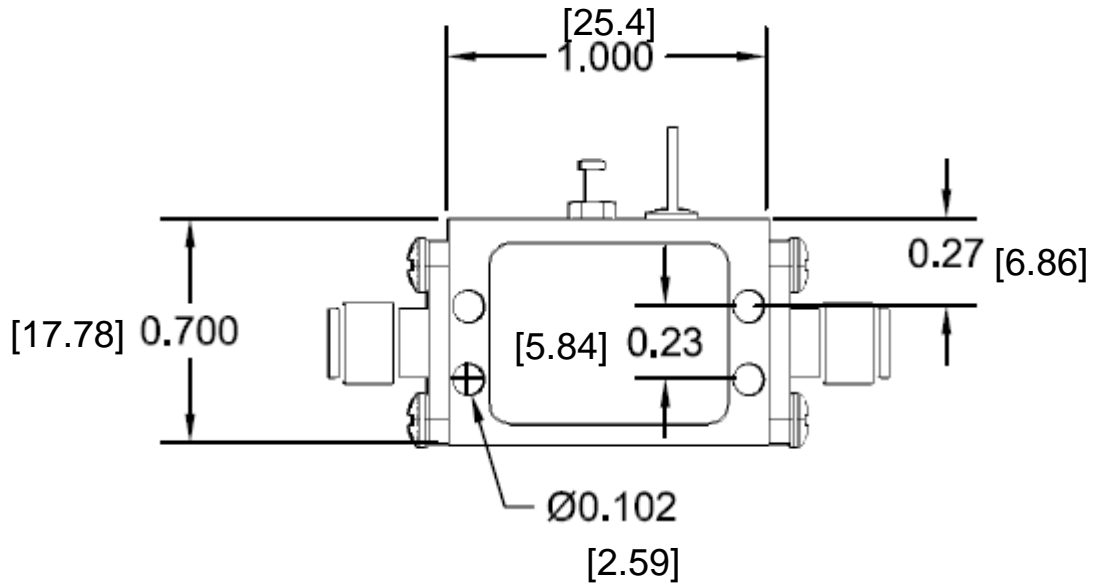

Model Number	Description	Hermeticity	Package
AMT-A0149	SMA Female	Non-Hermetic	Outline: M007

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

Contact Information:

**101 Bloomingdale Road
Hicksville, NY 11801
Phone: (516) 931-1760
Fax: (212) 374-1153**



info@agilemwt.com www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI products are not authorized for use as critical components in life support devices or systems.