



AMT-A0303 8 GHz to 18 GHz Ultra Low Noise Broadband Amplifier

Data Sheet

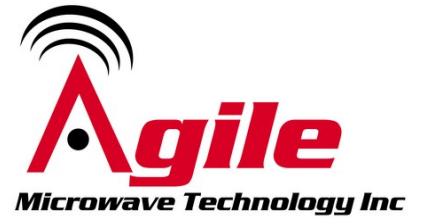

Features

- 8 GHz to 18 GHz Frequency Range
- **Typical Noise Figure 1.2 dB, 1.4 dB max**
- Typical Gain 32 dB
- Gain Flatness $\pm 1.5\text{ dB}$ typical
- P1dB +15 dBm Typical
- Internally Regulated
- Operates from a Single +12V Supply
- Unconditionally Stable
- State-of-the-Art GaAs Technology

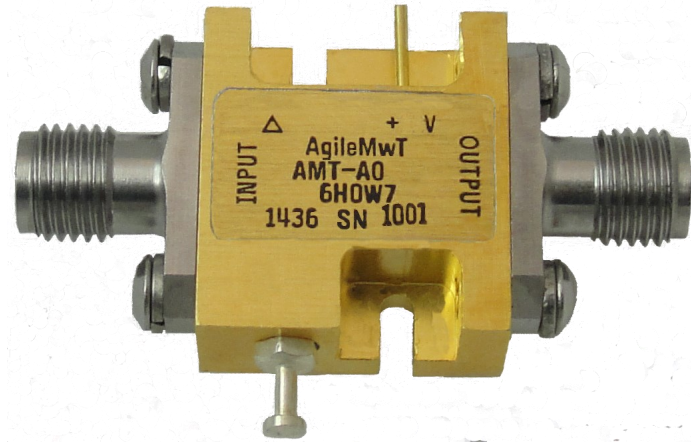

Description

The AMT-A0303 is a Broadband Ultra Low Noise amplifier with very low noise figure over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms. The AMT-A0303 is ideal for use as Front End of receiver system, or where amplification is required without adding excessive noise in a Hi-Rel communications system for Commercial or Military applications.

Applications

- Receiver front end,
- Radar
- Communication systems
- Microwave Radio systems
- Test Equipment

MAXIMUM RATINGS¹

EAR99

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T_{MO}	° C	-40	+85
Storage Temperature - Case	T_{MS}	° C	-55	+125
RF Input power (CW)	P_{in}	dBm		+10
Die $T_{Junction}$	T_J	° C		+150
Positive Supply Voltage	V_{+SS}	V		+12.5

Do NOT apply DC to RF Input

1. Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		GHz	8		18
Gain	Small Signal	dB	30	32	
Gain Flatness		dB		±1.5	± 2.5
Input Power	CW, without damage	dBm	10		
Output Power (P1dB)	1 dB compression point @ 12GHz	dBm	10	15.5	
OIP3	OIP3 measured @ 15 GHz Two tone F1-F2= 10MHz	dB		20	
Noise Figure		dB		1.2	1.4
RF Input Impedance	Reference to 50 ohms VSWR			1.8:1	2.4:1
RF Output Impedance	Reference to 50 ohms			1:8:1	2.3:1
Supply Voltage Positive:		V		+12	
Supply Current Positive:		mA		70	100

Notes:


1/ Unconditional Stability

Customized configurations of the above specifications are available

Typical Performance

S-Parameters @ 23C


CH1 LOG 10 dB/ REF 0 dB
S11 3:-14.691 dB 13.000 000 000 GHz

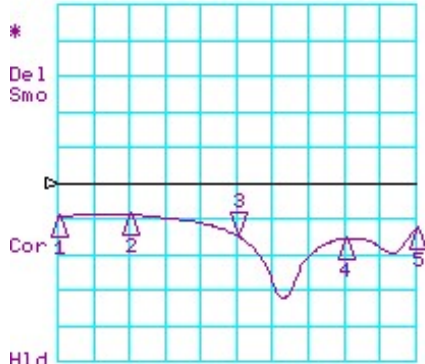

CH1 Markers
1:-9.4830 dB
8.00000 GHz
2:-8.7060 dB
10.0000 GHz
4:-15.470 dB
16.0000 GHz
5:-12.939 dB
18.0000 GHz

H1d
START 8000.000 MHz STOP18000.000 MHz


CH3 LOG 10 dB/ REF -10 dB
S12 3:-54.900 dB 13.000 000 000 GHz

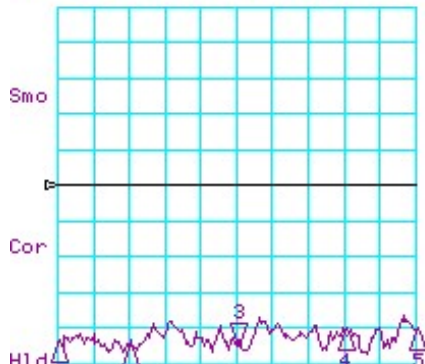

CH3 Markers
1:-53.765 dB
8.00000 GHz
2:-54.724 dB
10.0000 GHz
4:-50.523 dB
16.0000 GHz
5:-50.194 dB
18.0000 GHz

H1d
START 8000.000 MHz STOP18000.000 MHz


CH2 LOG 10 dB/ REF 0 dB
S21 3: 34.239 dB 13.000 000 000 GHz

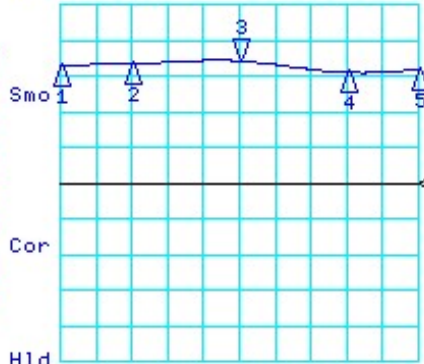

CH2 Markers
1: 32.907 dB
8.00000 GHz
2: 33.543 dB
10.0000 GHz
4: 31.063 dB
16.0000 GHz
5: 31.939 dB
18.0000 GHz


H1d
START 8000.000 MHz STOP18000.000 MHz

CH4 LOG 10 dB/ REF 0 dB
S22 3:-13.749 dB 13.000 000 000 GHz

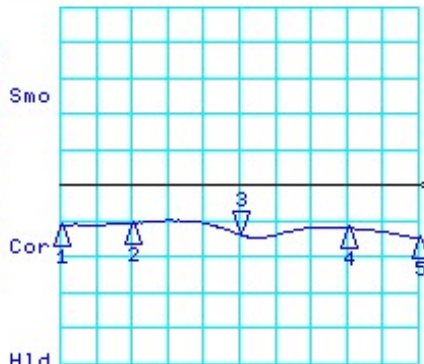


CH4 Markers
1:-11.063 dB
8.00000 GHz
2:-10.579 dB
10.0000 GHz
4:-11.818 dB
16.0000 GHz
5:-14.593 dB
18.0000 GHz

H1d
START 8000.000 MHz STOP18000.000 MHz

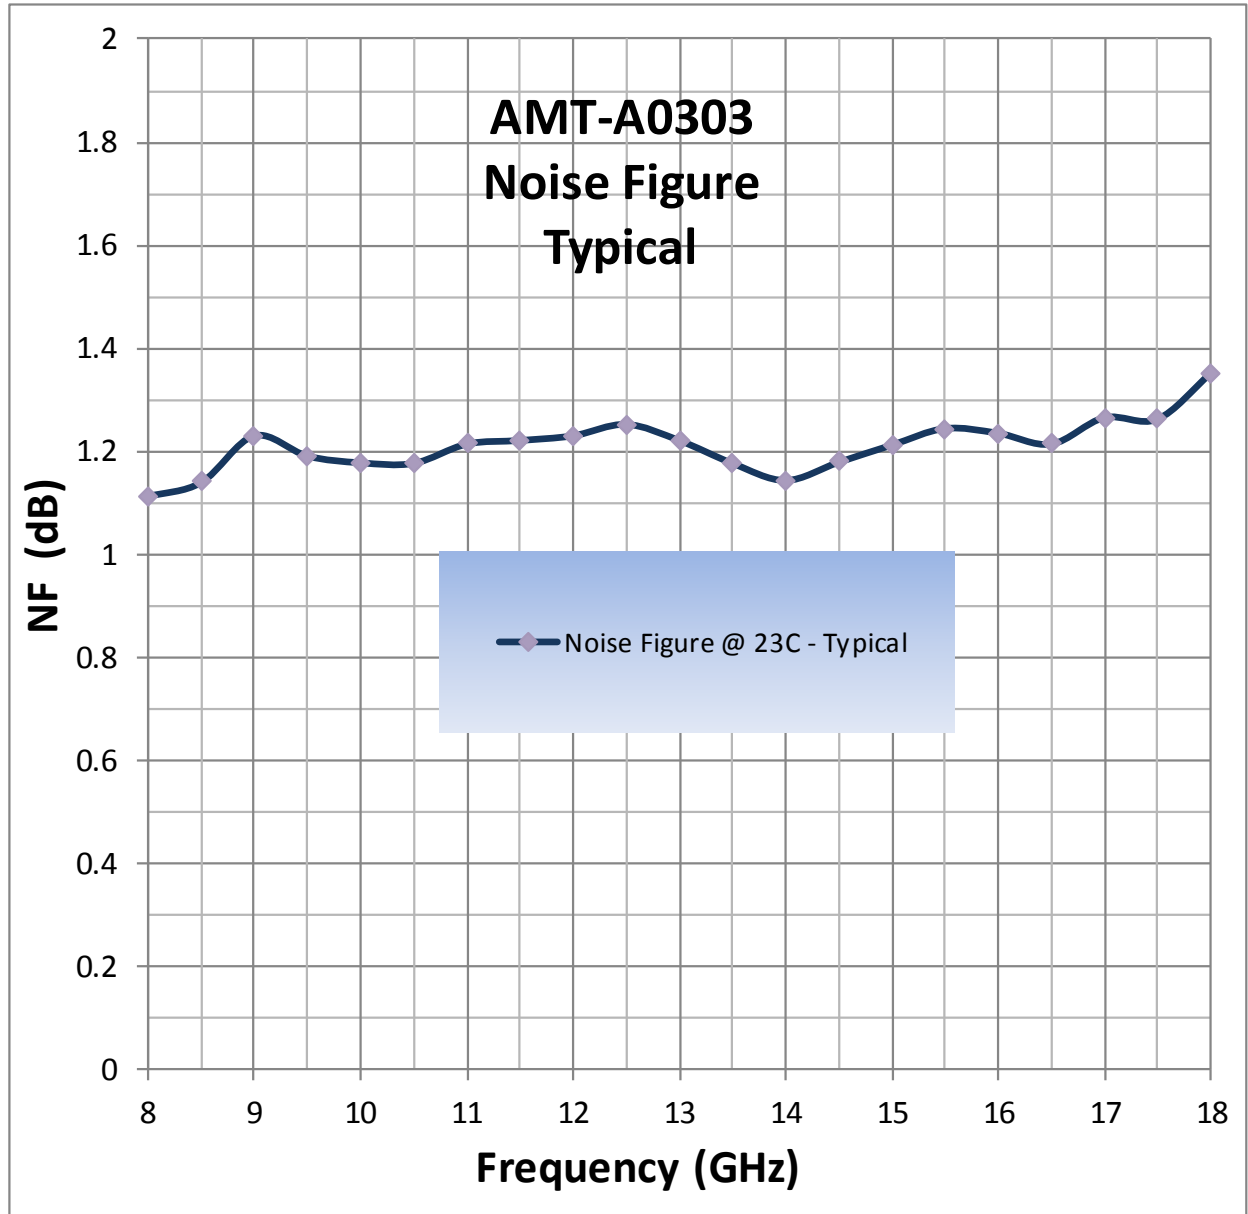

Package Outline: M088 SMA Connectorized mm(inches)

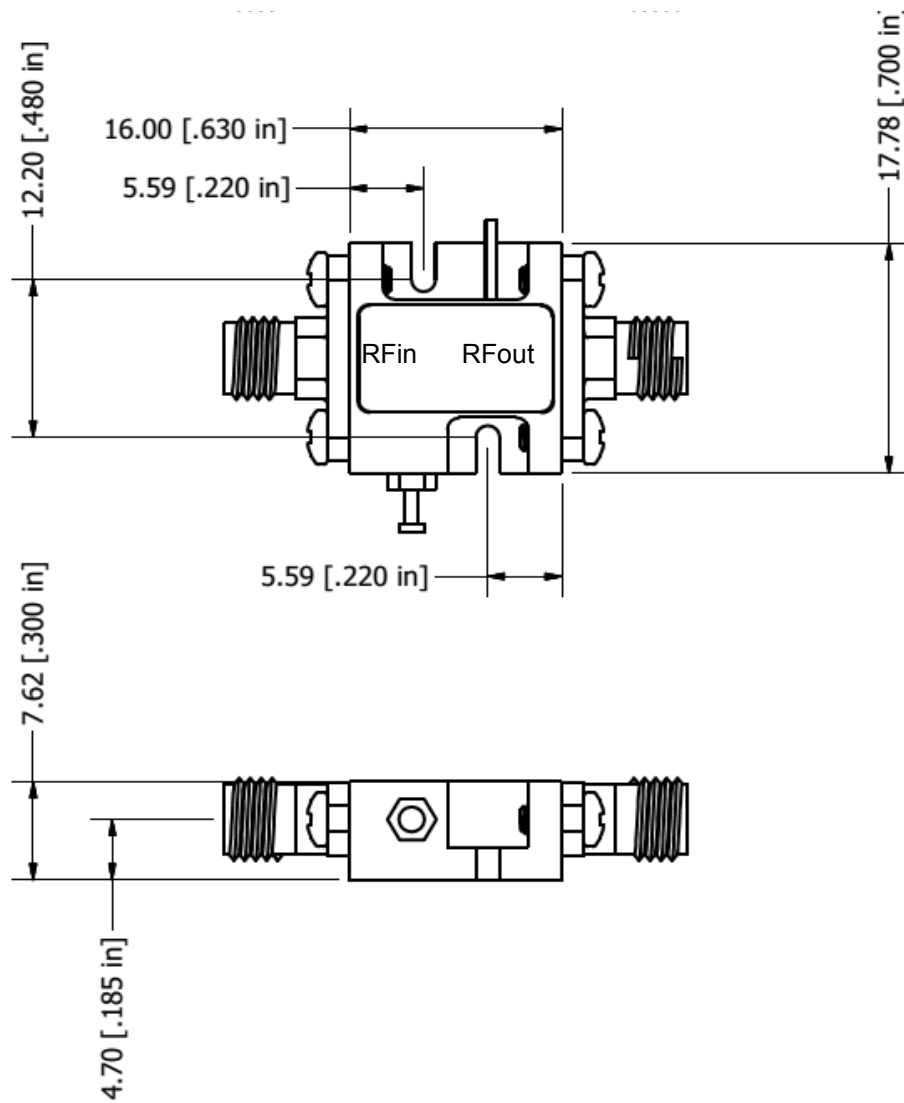

Housing: Aluminum Gold over Nickel plated
Removable SMA and Ground Slug

Model Number	Description	Hermeticity	Package
AMT-A0303	SMA Female	Non-Hermetic	Outline: M088

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

ISO 9001:2008 Certified Company


Contact Information:

**101 Bloomingdale Road
Hicksville, NY 11801**

Phone: (516) 931-1760

Fax: (212) 374-1153

info@agilemwt.com

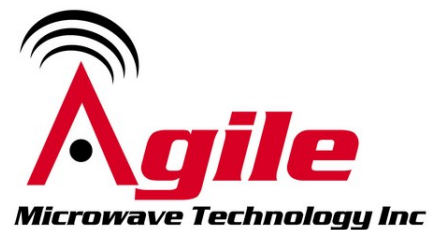

www.agilemwt.com

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied. AMTI reserves all rights.