


# AMT-A0333 7700 MHz to 8500 MHz 12W P1dB High Linearity Power Amplifier

Data Sheet

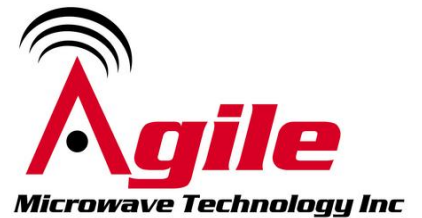

## Features

- 7700 MHz to 8500 MHz Frequency Range
- OIP3 > +53dBm Typical
- P1dB > +41 dBm
- Gain 39 dB Typical, 37 dB min
- Gain Flatness < ± 1 dB Typical
- NF 2.8 dB typical, 4 dB Max
- Return Loss In/Out Typ > 20 dB
- Internally Regulated
- Operates from Single +15V Supply



## Description

The AMT-A0333 is a High power amplifier with +41 dBm P1dB typical over the full frequency range. The performance is achieved through the use of AMTI's proprietary technology. The amplifier I/Os are Internally matched to 50 Ohms and are DC blocked. The AMT-A0333 is ideal for use as driver amplifier, or high power amplifier in a Hi-Rel communications system for Commercial or Military applications

## Applications

- Driver Amplifier
- High power output amplifier
- SATCOM
- Communication systems
- Microwave Radio systems
- Lab Use

## MAXIMUM RATINGS<sup>1</sup>

EAR99 NLR

Parameter	Symbol	Units	MIN	MAX
Operating Temperature – Case	T <sub>MO</sub>	° C	-20	+65
Storage Temperature - Case	T <sub>MS</sub>	° C	-40	+125
RF Input power (CW)	P <sub>in</sub>	dBm		+15
Die T <sub>Junction</sub>	T <sub>J</sub>	° C		+150
Positive Supply Voltage	V <sub>+SS</sub>	V		+16V

### The HPA must be attached to proper heat sink

1.Stresses above those listed under "Absolute Maximum Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL SPECIFICATIONS @ 23°C

Parameter	Conditions	Units	MIN	Typical	MAX
Frequency Range		MHz	7700		8500
Gain	Small Signal	dB	37	39	
Gain Flatness		dB		±1	
Output Power (P1dB)	1 dB compression point	dBm	+39.6	+41	
OIP3	OIP3 measured @ 7000 MHz Two tone F1-F2=10MHz	dBm	48	53	
Noise Figure		dB		2.8	4
RF Input Impedance	Reference to 50 ohms VSWR			1.4:1	2.:1
RF Output Impedance	Reference to 50 ohms			1:4:1	1.5:1
Supply Voltage Positive: Negative:		V		+15V	
Supply Current Positive: Negative:		A		5	

Notes:

1/ Unconditional Stability:

Customized configurations of the above specifications are available

**Package Outline: Connectorized (mm)**

Size 120mm X 75mm X 17mm  
Outline contact Factory

□

**Note: The unit must be attached to proper heat sink with thermal interface material ( Thermal Pad or Thermal Grease)**

<b>Model Number</b>	<b>Description</b>	<b>Hermeticity</b>	<b>Package</b>
AMT-A0333	SMA Female	Non-Hermetic	Outline: Contact Factory

Contact us for custom configurations and special requirements.

Our highly experienced team of engineers can quickly identify and implement innovative solutions using latest technology to improve performance and reduce cost.

- Add additional functionality: Input limiter, Temperature compensation, Amplitude/Phase matching, Amplitude/Phase Tracking, Automatic Gain control, Gain sloping, Bypass path, Specific supply voltage, Regulation, Power detector, Health status, and others
- Integrated: Filters, Switches, Limiter, Digital attenuator, Phase shifter, Microcontroller, Multiple amplifiers, Switch matrix, Comb generators and others
- Mechanical: Custom packages - Surface Mount, Connectorized, Waveguide, Carrier, Drop-in, Hermetic and others

Agile Microwave Technology Inc is the logical choice for all your commercial or military RF/Microwave components/module requirements.

## Contact Information:

**101 Bloomingdale Road**  
**Hicksville, NY 11801**  
**Phone: (516) 931-1760**  
**Fax: (212) 374-1153**



**[info@agilemwt.com](mailto:info@agilemwt.com)**   **[www.agilemwt.com](http://www.agilemwt.com)**

AMTI reserves the right to change at any time without notice the design, specifications, function/form or availability of its products described herein. The buyer/customer has the responsibility to validate the performance for their applications. No liability is assumed as result of use of this product and no patent licenses are implied.